

Installation guide

Thermostatic expansion valve Type TR 6


067R9508

067R9508

Refrigerants:
R22/R407C and R410A

Max. working pressure:
PS / MWP = 42 bar / 610 psig

Max. test pressure:
47 bar / 680 psig

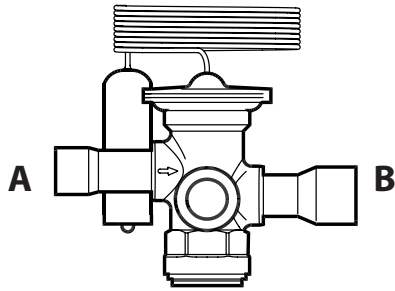

Fixed setting

Flow direction:




Normal: A → B



Reverse: B → A

$Q_{nom. A \rightarrow B} [kW / TR] = 100\%$

$Q_{nom. B \rightarrow A} [kW / TR] = 80\%$

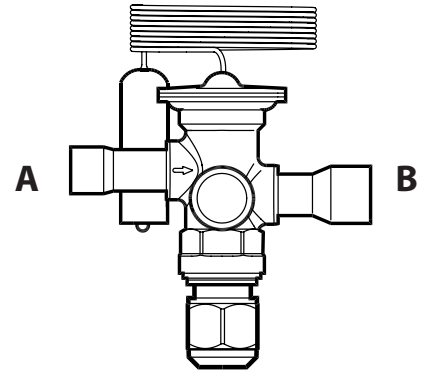

Adjustable setting

