KOHLER. Faucets

Fairfax®
Kitchen Sink Faucet
K-12172

Features
- Matching sidespray provides flexibility and convenience for cleaning and food prep.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- Swing spout offers increased clearance for filling pots and cleaning.
- Single lever handle is simple to use and makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)]
- Meets CalGreen requirements for kitchen faucets.

Material
- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.

Installation
- Three-hole installation (escutcheon included).
- Flexible supply lines simplify installation.

Optional Products/Accessories
1030920 Side Spray Deep Rough-In



ADA | **CSA B651**

Codes/Standards
ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651

KOHLER® Faucet Lifetime Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.


Color	Code	Description
	BN	Vibrant® Brushed Nickel
	CB	Polished Chrome with Vibrant® Polished Brass Accents

KOHLER. Faucets

Fairfax®

Kitchen Sink Faucet

K-12172

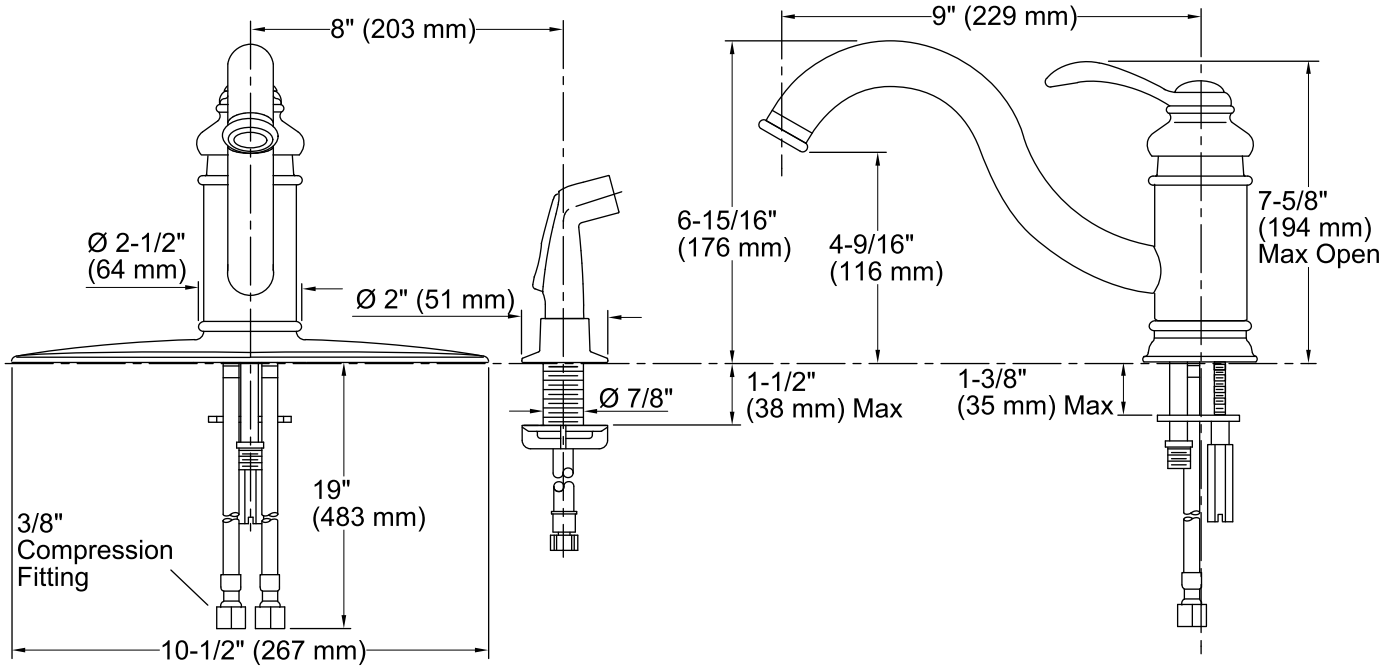

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate:	1.5 gal/min (5.7 l/min)
Pressure:	60 psi (4.1 bar)

Spout:

Spout reach:	9" (229 mm)

Notes

Install this product according to the installation guide.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.