

### Features

- High-arch gooseneck swing spout offers superior clearance for filling pots and cleaning
- 7-5/8" (194 mm) high-arch rotating spout
- 3" (76 mm) spout reach
- Single, right-hand lever handle is simple to use and makes adjusting water volume easy
- Traditional styling
- 1.6 gpm (6.0 lpm) maximum flow rate
- Quarter-turn washerless ceramic disc valves
- For use with Aquifer water filtration system
- Not to be used to deliver hot water or with reverse osmosis filtration systems

### Material

- Brass
- KOHLER® finishes resist corrosion and tarnishing

### Installation

- Single-hole installation

### Recommended Products/Accessories

K-77685 Single-Cartridge Water Filtration System  
K-77686 Double-Cartridge Water Filtration System  
K-23723 Faucet cleaner

### Included Components

1329347 Air gap device



ADA CSA B651

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA


ICC/ANSI A117.1

CSA B651

IAPMO Certification

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

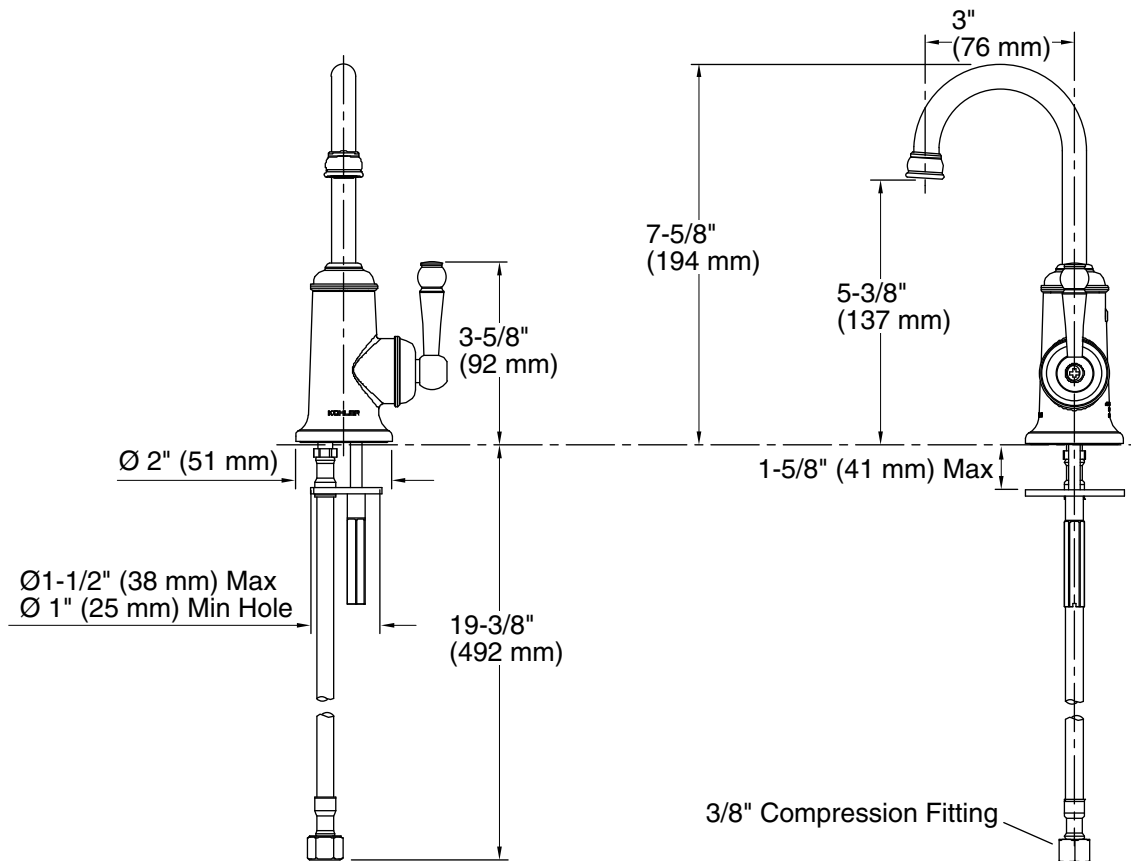

## Technical Information

All product dimensions are nominal.

### Spout:

Spout reach: 3" (76 mm)

## Notes

Install this product according to the installation guide.

**NOTICE:** Do not use this product with instant hot water systems or reverse osmosis (RO) filtration systems. Product damage will result.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.