

### Features

- Frameless, 1/4" (6 mm) thick Falling Lines tempered glass.
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.

### Technology

- Inside and outside solid-brass pull handles.
- Two roller-compression latches ensure smooth, secure closure.

### Installation

- Out-of-plumb adjustability simplifies installation.
- Door can be installed to open to the left or right to suit your bathroom layout.
- Not for use in hospitality.

### Recommended Products/Accessories

K-23723 Faucet cleaner

### Included Components

Additional Components:

Hardware kit



### Codes/Standards

CPSC 16CFR 1201  
ANSI Z97.1


### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

### Available Glass Options

Code	Description
G54	Falling Lines

**DISCONTINUED** This product has been discontinued.

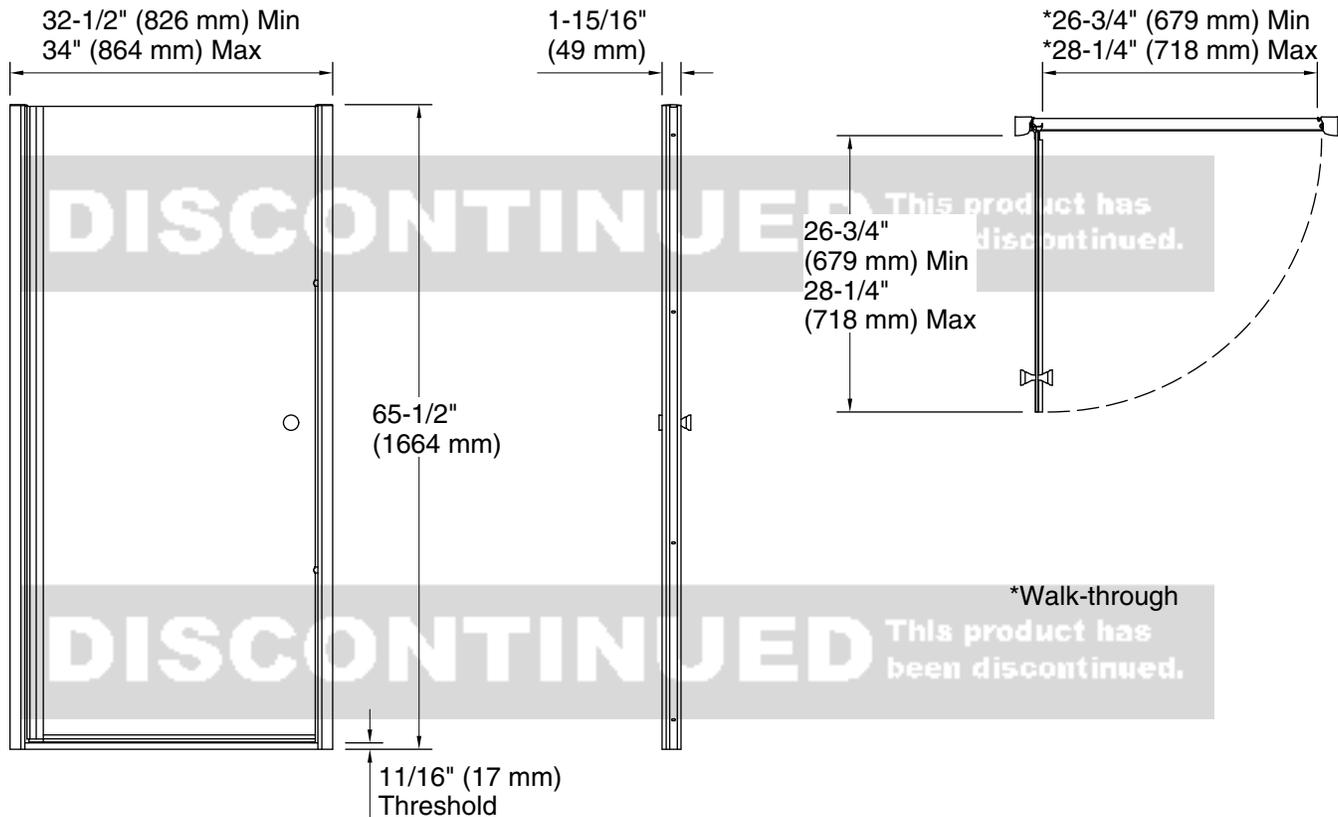

## Technical Information

All product dimensions are nominal.

Installation type:	For shower base installation
Opening style:	Hinged
Opening Width - Min:	32-1/2" (826 mm)
Opening Width - Max:	34" (864 mm)
Walk-through - Min:	26-3/4" (679 mm)
Walk-through - Max:	28-1/4" (718 mm)
Base-To-Wall:	3/8" (10 mm)
Radius - Max:	
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

## Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 66" (1676 mm) to allow for installation clearance.