# **KOHLER**<sub>®</sub>

# Levity® Frameless Sliding Shower Door K-706015-D3

# Features

- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.
- Cushioned center guide provides smooth, quiet sliding action.
- Gently curved towel bars, inside and outside, provide integrated storage on the door.
- CleanCoat<sup>®</sup> technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.

# Technology

• Frameless, 1/4-inch-thick Frosted tempered glass.

# Installation

- Sliding shower door.
- Not for use in hospitality.

### Recommended Products/Accessories K-23723 Faucet cleaner

# **Included Components**

Additional Components: Hardware kit



# **Codes/Standards**

CPSC 16CFR 1201 ANSI Z97.1

# KOHLER<sup>®</sup> One-Year Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

# Color Code Description Image: SH Bright Silver Image: MX Matte Nickel Image: ABV Anodized Brushed Bronze ABZ Anodized Dark Bronze BL Matte Black

# **Available Glass Options**


Code Description

D3 Frosted





# Levity® Frameless Sliding Shower Door K-706015-D3

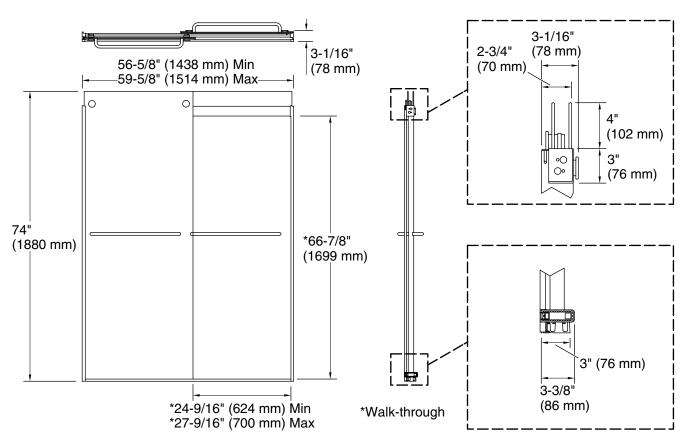

# **Technical Information**

All product dimensions are nominal.

Installation type:	For shower base installation
Opening style:	Sliding/Bypass
Opening Width - Min:	56-5/8" (1438 mm)
Opening Width - Max:	59-5/8" (1514 mm)
Walk-through - Min:	24-9/16" (624 mm)
Walk-through - Max:	27-9/16" (700 mm)
Base-To-Wall Radius – Max:	1/2" (13 mm)
Glass thickness:	1/4" (6 mm)
Glass coating:	CleanCoat®

## Notes

Install this product according to the installation guide.

If replacing a shower door, the narrow wall jamb design of this door may not cover the existing shower door holes.

The vertical opening should be a minimum of 76-1/2" (1943 mm) to allow for installation clearance.

