

## Pinstripe® Transfer Or Diverter Valve Trim K-T13175-4A

#### **Features**

- Includes face plate with handle.
- Single handle controls flow to outlets.
- Supplied with ADA compliant metal Pure Design lever handle.
- When used with K-728 Series MasterShower diverter valves, handle controls flow to two or three outlets individually or any two outlets at a time.
- When used with K-737 Series MasterShower diverter valves, handle controls flow to two or three outlets individually or only one outlet at a time.
- Valve (not supplied) can be configured on site for two or three outlet operation.
- 360 degree handle rotation with three-outlet operation.
- 120 degree handle rotation with two-outlet operation.
- Complements Pinstripe faucets and accessories.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Trim only; requires valve to complete installation (sold separately).
- Patented K-joint installation technology ensures consistent trim appearance, regardless of variability in valve rough-in.

### **Recommended Products/Accessories**

K-728-K 3/4" Two- or Three-Way Transfer Valve K-737-K 3/4" Two- or Three-Way Diverter Valve K-23723 Faucet cleaner



| ADA | CSA | B651 | ОВС |
|-----|-----|------|-----|
|-----|-----|------|-----|

### Codes/Standards

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651 OBC

## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes


Color tiles intended for reference only.


| Color | Code | Description              |
|-------|------|--------------------------|
|       | CP   | Polished Chrome          |
|       | SN   | Vibrant® Polished Nickel |
|       | BN   | Vibrant® Brushed Nickel  |



### **KOHLER**, Faucets

# Pinstripe® Transfer Or Diverter Valve Trim K-T13175-4A

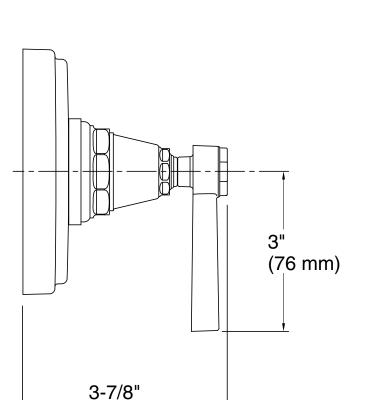

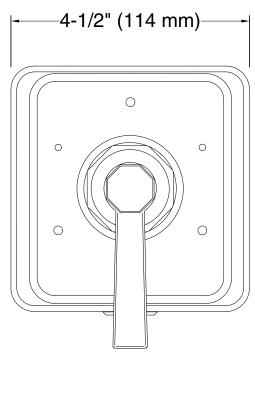

### **Technical Information**

All product dimensions are nominal.

(98 mm)

### **Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

